

# Wire tie gun calibration



Making your work easy



573 Route 30, Imperial, Pennsylvania



Tel: 724-695-2829



e-mail: [support@cs-technologies.com](mailto:support@cs-technologies.com)  
web page: [www.cs-technologies.com](http://www.cs-technologies.com)




## APT1000 standard pull tester



## Wire tie gun calibration kit installed on standard APT1000



## Efficient calibration of wire tie guns

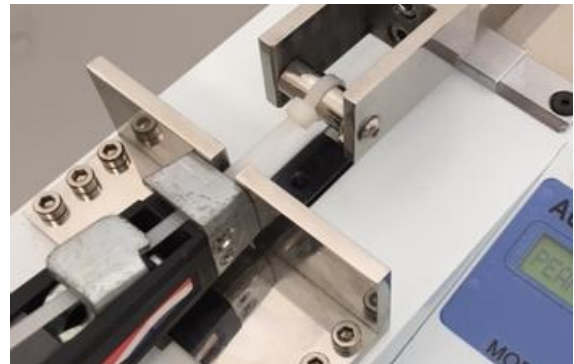

Model	APT250	APT500	APT1000
Capacity	245N(25Kg)	490N(50Kg)	980N(100Kg)
Speed	-50 (25-50mm/min)		
(for all models)	-100 (50-100mm/min)		
	-200 (100-200mm/min)		
Pull stroke	48mm		
Resolution	0.1N		
Measurement units	N / Kg / lb		
Power supply	100 - 240 VAC		
Power consumption	19.2 Watts		
Data output	RS232C communication		
Dimensions	W180 X D285 X H170		
Weight	Approx. 11Kg		

Querétaro, México: Alejandro Montelongo  
[amontelongo@cs-technologies.com](mailto:amontelongo@cs-technologies.com)  
Mobile: (521) 442 -322-3917

Chihuahua, México: José Cazares  
[jcazares@cs-technologies.com](mailto:jcazares@cs-technologies.com)  
Mobile: (521) 656-626-6188

Juárez, México: Carlos Torres  
[ctorres@cs-technologies.com](mailto:ctorres@cs-technologies.com)  
Mobile: (521) 656-638-9502

